

Installation Instructions & Use Recommendations

FMS Accessories – 2026+ H-D Laptop Adapter

These instructions must be read carefully and thoroughly **before** beginning work. FMS Solutions, LLC accepts no liability for damage caused by failure to observe the installation instructions or use recommendations.

Installation of this accessory does not change the factory specified load limits for the motorcycle.




There are four (4) mounting bolts that secure the H-D top box to the motorcycle frame. With the assistance of another person holding the box, remove the four bolts, clean them, and reinstall them with Loctite in the four locations shown in the drawing. Torque to factory settings.



The studs with 25mm riser are not pressed into the mounting adapter for a reason. Remove the nuts and washers on the adapter mounts. Extend the articulated mount to gain access to the mounting points. Place the mount over the studs on the right first (they are fixed), then the left (they have a little movement). Place washer, then M6 serrated flange nut on each stud and tighten snugly.



Check clearance as printer comes up onto top box edge (angled). If too close, add a washer under the right side mount nearest the top box latch to elevate it if needed. Once proper clearance has been verified, tighten M6 nuts to 8 ft-lbs of torque.

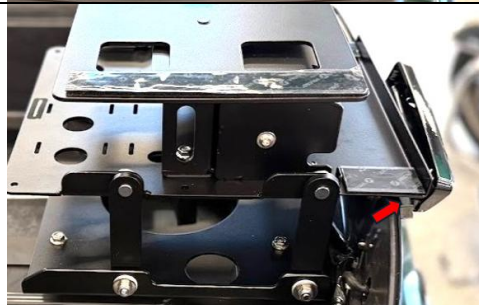

Maintenance:

There are eight (8) friction fasteners securing the articulated arms. There will be some “break-in” / “seating” of those connections. You may need to snug-up the M6 nuts with a 10 mm wrench. Don’t over-tighten ... these should just be snug ... not tight, to allow movement.

The pivot washer may also experience some “break-in” and require adjustment. There is an M6 double-nut arrangement securing it. You may from time-to-time need to snug this connection.



Feedback: Thank you for your purchase and we welcome your feedback as we too want to make every accessory exceed your expectations. Report any comments, suggestions, problems or concerns to FMS Solutions, LLC at info@fmsaccessories.com .

FMS Solutions, LLC Limited Warranty

FMS Solutions, LLC warrants to the first retail purchaser of new FMS Accessory products, to be free from defects in materials or workmanship, for a period of three (3) years from the original date of purchase as noted on the FMS Solutions, LLC invoice or original dealer invoice, except for paint and powder-coated finishes, which are warranted for the first 12 months only. LED lights from Fenix, Inc., Code 3, Inc. and Littlite are covered for 5 years by their manufacturer’s respective warranties – processed through FMS Solutions, LLC.

This warranty extends only to the FMS accessory and does not include: damage caused by accidents or abuse; incorrect installation; labor to diagnose, remove, repair or replace; any consequential damage or loss of use. Any FMS Accessory suspected of being defective should be returned to FMS Solutions, LLC along with a copy of proof of purchase and warranty request form available on the FMS website. FMS Solutions, LLC will determine if the FMS accessory has a warrantable defect, and if so, will repair or replace the item and return it to the sender without charge. The decision to repair or replace said item is solely the prerogative of FMS Solutions, LLC.

Note: Police motors can operate in a very rough environment since police motors are a “tool”. They can be dropped, knocked-over, etc. without concern as the officer has a job to do and determines what is necessary at any given moment. Warranty is for defects in materials or workmanship. Therefore, the ability of an item to become broken or damaged does not mean it is warranty ... it just means it is broken or damaged and in need of repair or replacement. No manufacturer warrants their products to be indestructible. Any questions should be directed to info@fmsaccessories.com .